

CHICAGOLAND PAVING CONTRACTORS, INC.
225 TELSER ROAD
LAKE ZURICH, IL 60047
TEL: 847-550-9681 FAX: 847-550-9684

July 17, 2024

Wheaton Park District
Mr Steve Hinchee
1000 Manchester Rd
Wheaton, IL 60187

Re: Wheaton Park District
Northside Park Pickleball and Basketball Court Construction
#24-47 - AUP #1 - Undercut Pricing Options

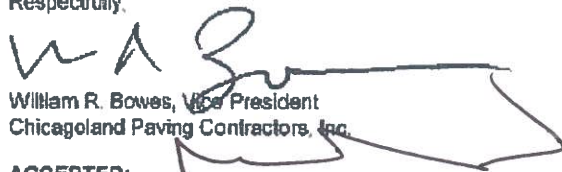
Mr. Hinchee,

Shown below is our pricing for the requested undercut options. Please provide us with your written approval by signing below and a formal change order if you would like the work to be completed at the prices shown.

<u>Item</u>	<u>Unit</u>	<u>Quantity</u>	<u>Unit Price</u>	<u>Total</u>
Price to add 1" to the asphalt binder course for a total of 2.5" binder. The surface course will remain 1.5"	LS	1	\$8,500.00	\$8,500.00
Price to install geogrid under the area of stone that is to be regraded.	LS	1	\$3,500.00	\$3,500.00
Price to flip the stone on the other half in order to install same geogrid on area that was not excavated in base bid.	LS	1	\$10,000.00	\$10,000.00
Price to install glass-grid between the binder course and surface course.	LS	1	\$9,500.00	\$9,500.00
Price to undercut the entire court 1', install specified geogrid and 3" stone.	LS	1	\$45,000.00	\$45,000.00
Total				

Selected Option

Respectfully,


William R. Bowes, Vice President
Chicagoland Paving Contractors, Inc.

ACCEPTED: Michael Bernard - Executive Director 9/19/24
Name / Title / Date

CHICAGOLAND PAVING CONTRACTORS, INC.
225 TELSER ROAD
LAKE ZURICH, IL 60047
TEL: 847-550-9681 FAX: 847-550-9684

August 29, 2024

Wheaton Park District
Mr Steve Hinchee
1000 Manchester Rd
Wheaton, IL 60157


Re: Wheaton Park District
Northside Park Pickleball and Basketball Court Construction
#24-47 - AUP #3 - Undercuts and Sidewalk


Mr. Hinchee,

Shown below is our pricing for the requested plan changes. Please provide us with your written approval by signing below and a formal change order if you would like the work to be completed at the prices shown.

<u>Item</u>	<u>Unit</u>	<u>Quantity</u>	<u>Unit Price</u>	<u>Total</u>
Sidewalk Removal (140sf)	LS	1		\$490.00
New Sidewalk w/Excavation (200sf)	LS	1		\$5,000.00
Undercut (Fabric, 12" of 3" Rock, 6" CA-6) (306sy)	LS	1		\$15,250.00
Curb R&R (10')	LS	1		\$1,000.00
Landscape Restoration (100sy)	LS	1		\$1,000.00
Total				\$22,740.00

Respectfully,


William R. Bowes, Vice President
Chicagoland Paving Contractors, Inc.

ACCEPTED:  8/14/24
Michael Benard - Executive Director
Name / Title / Date